

# **TITAN**

## **300 WATT GUITAR AMP**



***Randall*** <sup>USA</sup>  
A M P L I F I E R S

**OPERATIONS MANUAL**

# Controls & Features of the TITAN

**CHANNEL 1: (Green Led- Activated by pulling out on the Gain 1 knob, or by footswitch).**

This channel is for all Clean tone applications . For the cleanest sound, set the master 1 to a higher volume level(around 8 or 9). Gain 1 should be set to a lower volume(2 or 3), and increased or decreased for desired volume.

To add some gain to your clean tone, set Gain 1(8 or 9) to a higher volume & bring down the Master 1 level(2 or 3).

**NOTE: GAIN 1 knob must be pushed in when footswitch is in use.**

**CHANNEL 2: (Red Led)**

This channel is for all distorted tones. For classic to vintage sounds, set the Gain 2 knob to a lower level (2 to 5). Master 2 knob should than be adjust to desired volume. Heavy rock or metal tones are achieved by setting Gain 2 to a higher level(8 to 10), and adjusting the Master 2 knob to your desired volume.

**MIXTURE:**

After you've set Channel 1 to the desired clean tone, and Channel 2 to the desired distortion output, use the Level controls on Channels 1 and 2 to mix the clean and distorted channels evenly or to your liking.

**REFER TO THE SETTING SHEET FOR SOME OF THESE DESIRED TONES.**

**PREAMP Controls:**

The TITAN features two distinct channels, which are controlled by a 3-band master EQ., with sweepable mid-frequency.

**Gain 1- (Pull to Activate)Clean channel only, adds small amount of distortion to clean channel.**

**Master 1- Volume level of Clean channel only.**

**Gain 2 - Dirty channel only, Controls amount of distortion level.**

**Master 2- Volume level for Dirty channel only.**

**Bass- Controls amount of low end frequencies.**

**Mid Level- Serves a cut and boost for the mid frequencies. Setting on 5 is flat, 0 is maximum cut, 10 is maximum boost.**

**Mid Frequency- Controls mid frequency you choose to boost or cut.**

**Treble- Controls amount of high-end frequencies.**

**EFFECTS:**

Your TITAN is equipped with a custom set balanced digital reverb, (which can be adjusted to the desired amount). Other effects can be added through the effects loop on the rear panel.


**REAR CONTROL FEATURES:**

**Speaker outputs-** There are two speaker outputs which will handle 4,8 or 16ohm loads


**Effects loop-** This amp features a stereo send & return, to add on any outboard processors.

**Line-out with Level control -** Balanced line out with level control (signal only). Used for recording, or to use a different power supply.


# HEAVY METAL TONE

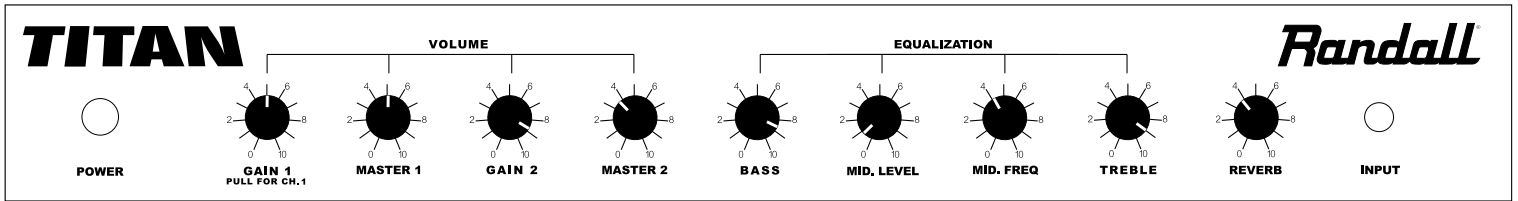

# HEAVY MODERN

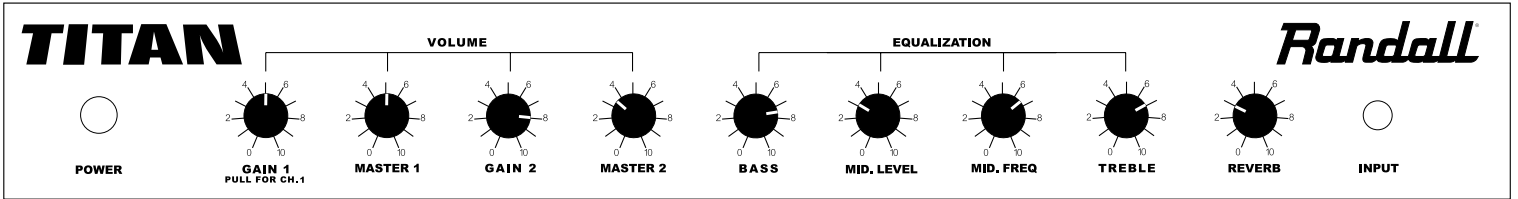

# VINTAGE TONE

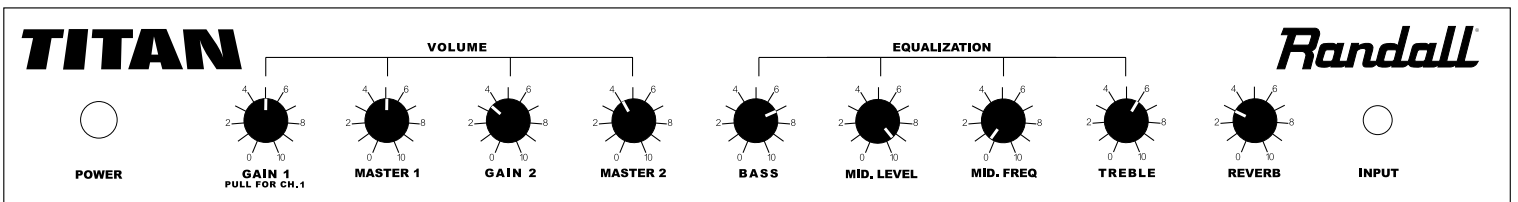

## IMPORTANT SAFEGUARDS

THESE WARNINGS APPLY TO ALL RANDALL ELECTRONIC PRODUCTS. PLEASE READ AND OBSERVE ALL WARNINGS AND INSTRUCTIONS CONTAINED IN THIS SERVICE MANUAL AND THOSE ON YOUR RANDALL PRODUCT PRIOR TO ITS USE.

### WARNINGS AND SYMBOLS:



**LIGHTNING FLASH:** The lightning flash with an arrowhead within an equilateral triangle, is intended to alert the user of the presence of uninsulated **DANGEROUS VOLTAGE** within the product's enclosure that may be of significant magnitude to constitute risk of electric shock to persons.





**EXCLAMATION POINT:** The exclamation point within an equilateral triangle, is intended to alert the user of the presence of **IMPORTANT OPERATING AND MAINTENANCE OR SERVICE INSTRUCTIONS** in the literature accompanying the product.

### PRECAUTIONARY WARNING:



**RAIN AND MOISTURE:** To reduce the risk of fire or electric shock, **DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.** Operators of electronic products should in no way be in contact with water.



**GROUNDING:** To prevent electric shock, **DO NOT DEFEAT THE 3 PRONG GROUNDING PLUG** on product's power cord. Do not use an adapter, extension cord or outlet unless the blades can be fully inserted to prevent blade exposure.

### WARNING GRAPHIC ON PRODUCT:



ATTENTION  
RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR

### WARNING GRAPHIC ON PRODUCT:

**CAUTION:** TO PREVENT FIRE OR ELECTRICAL SHOCK, DO NOT EXPOSE TO RAIN OR MOISTURE

# **THANK YOU FOR CHOOSING RANDALL**

**WE ARE GLAD YOU HAVE CHOSEN US TO BE YOUR MUSICAL PARTNER. OUR GOAL IS TO PRODUCE THE FINEST AMPS AVAILABLE ANYWHERE. WE HOPE YOUR NEW AMP WILL PROVIDE YOU WITH YEARS OF MUSICAL SATISFACTION. WE ARE HERE TO SERVE YOU AND WELCOME YOUR COMMENTS AND SUGGESTIONS. AGAIN, WE THANK YOU FOR MAKING RANDALL PART OF YOUR MUSICAL JOURNEY.**

To contact Randall amplifiers:  
Customer service dept.  
444 East Courtland Street  
Mundelein, IL. 60061  
Phone: 847-949-0444 Ext:230  
Fax: 847-949-8444  
Email: [randall@randallamplifiers.com](mailto:randall@randallamplifiers.com)

[www.randallamplifiers.com](http://www.randallamplifiers.com)

**Register your warranty online at:  
[www.randallamplifiers.com/warranty](http://www.randallamplifiers.com/warranty)**